

Hexagonal Plugs for Ex d/e Applications

AQUILA HEXAGONAL



Technical Details		
Material	Body Brass, Brass Nickel Plated, Stainless Steel 316L O-ring CR (Chloroprene), Silicone	
Ingress Protection Rating	IP 68 - 5 Bar, 30 min IP 66	
Operating Temperature	O-ring Material CR (Chloroprene) -40°C to +100°C Silicone 60°C to +130°C	
Equipment For	• Gas & Dust potentially explosive atmospheres.	
Suitable for use in	Group II Gas Group IIC ZONE1/ZONE2 Group III Dust Group IIIC ZONE21/ZONE 22	
Marking Example *	BMD MB-TS.. CE 0722 II 2GD Ex db IIC Gb Ex eb IIC Gb Ta-40°C to +100°C IP66/68 CESI 13 ATEX 066X IECEx CES 13.0022X	
Type Protection	Ex d ; Ex e ; Ex tb *For NB-TS type only Ex e ; Ex tb.	
Thread Type	• Metric (M) ISO Pitch 1,5 • Npt (N) ANSI ASME B1.20.1	
Accessories	• Gaskets (Washers) • Lock nuts	
Remarks	• O-ring available in Metric, PG and G threads. • Accessories must be ordered separately.	
Approvals	Certificate Number	Standards
	CESI 13 ATEX 066X	EN 60079-0:2012+A11:2013 EN 60079-1:2014 EN 60079-7:2015 EN 60079-31:2014
	IECEx CES 13.0022X	IEC 60079-0:2011 Edition:6 IEC 60079-1:2014 Edition:7 IEC 60079-31:2013 Edition:2 IEC 60079-7:2015 Edition:5
	E493186	UL 60079-0, UL 60079-1, UL 60079-7 UL 60079-31 CAN/CSA-C22.2 No. 60079-0:15, CAN/CSA-C22.2 No. 60079-1:16 CAN/CSA C22.2 No. 60079-7:12, CAN/CSA-C22.2 No. 60079-31:15,
	E467237	UL 508A C22.2 No. 14-13
	No TC RU C-TR.AA87.B.00941	FOCT 31610.0-2014 FOCT IEC 60079-1:2013 FOCT IEC 60079-31:2013
	DNV 12.0150 X	ABNT NBR IEC 60079-0:2008, ABNT NBR IEC 60079-1:2009, ABNT NBR IEC 60079-7:2008, ABNT NBR IEC 60079-31:2011
	E-14044	IEC/EN60079-0, IEC/EN60079-7, IEC/EN60079-31, IEC/EN60079-1 & IEC/EN 62444


- For details of approvals, see our website.

* The standard marking consists ATEX & IECEx only. Marking acc. to other standards on request.

Order Coding				
Part Number	Material	Seal	- Gasket (Washer)	Locknut
Mandatory	Mandatory	Mandatory	- Option	Option
See table	B Brass BN Brass Nickel plated X Stainless steel 316L	C Chloroprene S Silicone	- WC Chloroprene WS Silicone WF Fiber	L Locknut
Example				
B-TS3M	B	C	- WC	L

AQUILA HEXAGONAL

Hexagonal Plugs for Ex d/e Applications

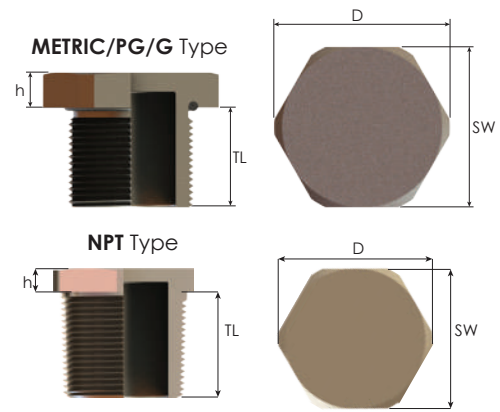

Thread Type METRIC acc. to ISO 965-3					
Outer Thread Size (Male)	Outer Thread Length		Spanner Width		Part Number
	TL mm	SW mm	Outer Ø mm	Height h mm	
M16x1,5	15,5	22	24,0	5,5	B-TS01M
M20x1,5	15,5	25	27,5	5,5	B-TS1M
M25x1,5	15,5	30	33,0	5,5	B-TS2M
M32x1,5	15,5	37	41,0	5,5	B-TS3M
M40x1,5	17,5	45	50,0	5,5	B-TS4M
M50x1,5	17,5	55	61,0	5,5	B-TS5M
M60x1,5	17,5	70	77,0	5,5	B-TS60M
M63x1,5	17,5	70	77,0	5,5	B-TS6M
M70x1,5	18,0	80	89,0	7,0	B-TS70M
M75x1,5	20,0	85	94,0	5,0	B-TS7M
M80x1,5	20,0	90	100,0	5,0	B-TS80M
M85x1,5	20,0	95	105,0	5,0	B-TS85M
M90x1,5	20,0	100	111,0	5,0	B-TS8M
M100x1,5	20,0	110	123,0	5,0	B-TS9M
M110x1,5	20,0	120	133,5	5,0	B-TS10M

Thread Type PG acc. to DIN 40430					
Outer Thread Size (Male)	Outer Thread Length		Spanner Width		Part Number
	TL mm	SW mm	Outer Ø mm	Height h mm	
PG 9	16,5	20	22,0	5,5	B-TS2P
PG 11	16,5	25	27,5	5,5	B-TS3P
PG 13,5	16,5	25	27,5	5,5	B-TS4P
PG 16	16,5	27	30,0	5,5	B-TS5P
PG 21	17,0	35	38,5	5,0	B-TS6P
PG 29	17,0	42	46,5	5,0	B-TS7P
PG 36	17,0	55	61,0	5,0	B-TS8P
PG 42	17,0	60	66,5	5,0	B-TS9P
PG 48	17,0	65	72,0	5,0	B-TS10P

Thread Type G acc. to GAS UNI ISO 228/1					
Outer Thread Size (Male)	Outer Thread Length		Spanner Width		Part Number
	TL mm	SW mm	Outer Ø mm	Height h mm	
G 3/8"	17,5	22	24,0	5,5	B-TS01C
G 1/2"	18,0	25	27,5	5,0	B-TS1C
G 3/4"	18,0	32	35,5	5,0	B-TS2C
G 1"	22,0	37	41,0	5,0	B-TS3C
G 1 1/4"	22,0	45	50,0	5,0	B-TS4C
G 1 1/2"	22,0	55	61,0	5,0	B-TS5C
G 2"	22,0	65	72,0	5,0	B-TS6C
G 2 1/2"	22,0	85	94,0	8,0	B-TS7C
G 3"	22,0	95	105,0	8,0	B-TS8C
G 3 1/2"	22,0	110	123,0	8,0	B-TS9C
G 4"	22,0	120	133,5	8,0	B-TS10C

Thread Type NPT acc. to ANSI ASME B1.20.1					
Outer Thread Size (Male)	Outer Thread Length		Spanner Width		Part Number
	TL mm	SW mm	Outer Ø mm	Height h mm	
NPT 3/8"	16,0	20	22,0	4,0	NB-TS01N
NPT 1/2"	18,0	24	26,5	4,0	NB-TS1N
NPT 3/4"	18,0	28	31,0	4,0	NB-TS2N
NPT 1"	21,0	35	38,5	4,0	NB-TS3N
NPT 1 1/4"	21,0	45	50,0	4,0	NB-TS4N
NPT 1 1/2"	21,0	50	55,5	5,0	NB-TS5N
NPT 2"	21,0	65	72,0	5,0	NB-TS6N
NPT 2 1/2"	28,0	75	83,0	5,0	NB-TS7N
NPT 3"	28,0	95	105,0	5,0	NB-TS8N
NPT 3 1/2"	28,0	100	123,0	5,0	NB-TS9N
NPT 4"	28,0	120	134,0	5,0	NB-TS10N

*NPT type is only Ex e.