

EMC Servo Ampacity Cable Glands Lead-Free Brass




EMC-FA cable glands with high current proof, open moving spring contact

- For metal machines and housings.
- Lead-free.
- Vibration proof EMC performance.
- For high current proof applications.
- Specially designed EMC protective cable glands.
- Long-lasting contact by high definition contact spring.
- Moving spring contact offers reduced risk of sheath damage.
- Easy movement of cable as long as not fastened.
- Easy assembly: install cable gland - prepare cable sheath - insert cable - tighten cap.
- Easy assembly and disassembly of cable. Spring closes and opens according to fastening of the cap.
- High quality strain relief and sealing, reliable performance for EMC applications.
- Up-to-date international approvals.

Technical Details		
Material	Body, Cap	Lead-free brass, Nickel plated
	Seal	CR (Chloroprene)
	Clamping Insert	PA 6 (Polyamide 6)
	Contact Springs	Special Copper Alloy
	O-Ring	NBR
Ingress Protection Rating	IP 68 - 5 Bar, 30 min	
Flammability	V2 according to UL94	
Operating Temperature	Permanent	-20 °C to +100 °C
	Intermittent	-40 °C to +150 °C
Thread Type	<ul style="list-style-type: none"> • Metric EN 60423 • NPT ANSI B1.20.1 	
Cable Type	Shielded	
Accessories	<ul style="list-style-type: none"> • EMC Locknuts • Dome plugs • Gaskets (Washers) 	
Remarks	<ul style="list-style-type: none"> • Manufactured according to DIN EN 62444/50262. • We recommend the use of lock nuts and gaskets to ensure IP rating for rough surfaces or through holes. • Some approvals do not cover all sizes. • O-ring is available in Metric thread as a standard. For NPT threads O-ring available upon request. • Accessories must be ordered separately. • Other lock nut types also available upon request. 	
Approvals	Certificate Number	Standards
	40039349	In progress
	E-199260	In progress

For more approvals: see our webpage.



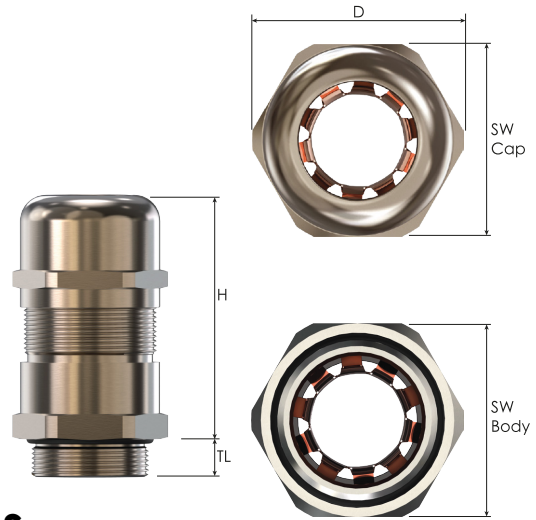

EMC Servo Ampacity Cable Glands Lead-Free Brass

Thread Type **METRIC** acc. to EN 60423

Outer Thread Size (Male)	Clamping Range Ø min-max mm	Shield Diameter Ø min-max mm	Outer Thread Length TL mm	Spanner Width		Outer Ø D mm	max. Height H mm	Part Number
				Cap SW Cap mm	Body SW Body mm			
M20x1,5	6,0 - 12,0	4,5 - 10,0	8,0	22	22	24,5	42,5	BMEM-52S (LF)
	7,5 - 14,0	5,5 - 11,0	8,0	24	24	26,8	45,5	BMEM-52 (LF)
M25x1,5	10,0 - 18,0	7,0 - 14,0	8,0	30	30	33,0	54,0	BMEM-53 (LF)
M32x1,5	16,0 - 25,0	12,0 - 20,0	9,0	40	40	44,5	62,5	BMEM-54 (LF)
M40x1,5	22,0 - 32,0	18,0 - 27,0	9,0	50	50	55,5	68,5	BMEM-55 (LF)
M50x1,5	30,0 - 38,0	26,0 - 34,0	9,0	58	58	64,0	66,0	BMEM-56 (LF)
M63x1,5	34,0 - 44,0	30,0 - 40,0	14,0	64	68	75,0	67,5	BMEM-57 (LF)

Thread Type **NPT** acc. to ANSI B1.20.1

Outer Thread Size (Male)	Clamping Range Ø min-max mm	Shield Diameter Ø min-max mm	Outer Thread Length TL mm	Spanner Width		Outer Ø D mm	max. Height H mm	Part Number
				Cap SW Cap mm	Body SW Body mm			
NPT 1/2"	6,0 - 12,0	4,5 - 10,0	15,0	22	24	26,5	42,0	BNEM-52S (LF)
	7,5 - 14,0	5,5 - 11,0	15,0	24	24	26,8	44,5	BNEM-52 (LF)
NPT 3/4"	10,0 - 18,0	7,0 - 14,0	15,0	30	30	33,0	53,5	BNEM-53 (LF)
NPT 1"	16,0 - 25,0	12,0 - 20,0	20,0	40	40	44,5	62,0	BNEM-54 (LF)
NPT 1 1/4"	22,0 - 32,0	18,0 - 27,0	20,0	50	50	64,0	68,5	BNEM-55 (LF)
NPT 1 1/2"	30,0 - 38,0	26,0 - 34,0	20,0	58	58	64,0	65,5	BNEM-56 (LF)
NPT 2"	34,0 - 44,0	30,0 - 40,0	22,0	64	68	75,0	73,5	BNEM-57 (LF)

