



















## CRUX Cable Glands for Non-Armoured Cables

Crux




Technical Details															
<b>Body, Cap</b>	Brass, Brass Nickel Plated, Stainless Steel														
<b>Inner Parts</b>	Brass, Brass Nickel Plated, Stainless Steel														
<b>Material</b>	<b>Seal</b> Halogen Free Silicone														
	<b>O-ring</b> Halogen Free Silicone														
<b>Ingress Protection Rating</b>	IP 68 - 5 Bar, 30 min IP 66														
<b>Operating Temperature</b>	<b>Seal Material</b> <b>Silicone</b> -60°C to +130°C														
<b>Equipment For</b>	Gas & Dust potentially explosive atmospheres														
<b>Suitable for use in</b>	Group II                      Gas Group IIC                      ZONE1 / ZONE2 Group III                      Dust Group IIIC                      ZONE21 / ZONE 22														
<b>Equipment Marking</b>	Ex II 2GD Ex eb IIC Gb Ex tb IIIC Db														
<b>Thread Type</b>	<ul style="list-style-type: none"> <li>• Metric (M) ISO Pitch 1,5</li> <li>• NPT (N) ANSI ASME B1.20.1</li> <li>• Other thread types also available upon request.</li> </ul>														
<b>Cable Type</b>	Non-armoured & Braided when terminated inside enclosure														
<b>Accessories</b>	<ul style="list-style-type: none"> <li>• Lock nuts</li> <li>• Deluge Seal</li> <li>• Gaskets (Washers)</li> <li>• Serrated Washers</li> <li>• Earth tags</li> <li>• Shroud</li> </ul>														
<b>Remarks</b>	• Accessories must be ordered separately.														
<b>Approvals</b>	<table border="1"> <thead> <tr> <th>Certificate Number</th> <th>Standards</th> </tr> </thead> <tbody> <tr> <td> CESI 21 ATEX 031X</td> <td>EN 60079-0 EN 60079-7 EN 60079-31</td> </tr> <tr> <td> IECEx CES 22.0009X</td> <td>IEC 60079-0 IEC 60079-7 IEC 60079-31</td> </tr> <tr> <td> In progress</td> <td>In progress</td> </tr> <tr> <td> In progress</td> <td>In progress</td> </tr> <tr> <td> In progress</td> <td>In progress</td> </tr> <tr> <td> In progress</td> <td>In progress</td> </tr> </tbody> </table>	Certificate Number	Standards	 CESI 21 ATEX 031X	EN 60079-0 EN 60079-7 EN 60079-31	 IECEx CES 22.0009X	IEC 60079-0 IEC 60079-7 IEC 60079-31	 In progress	In progress	 In progress	In progress	 In progress	In progress	 In progress	In progress
Certificate Number	Standards														
 CESI 21 ATEX 031X	EN 60079-0 EN 60079-7 EN 60079-31														
 IECEx CES 22.0009X	IEC 60079-0 IEC 60079-7 IEC 60079-31														
 In progress	In progress														
 In progress	In progress														
 In progress	In progress														
 In progress	In progress														
-For details of approvals, see our website. * The standard marking consists ATEX & IECEx only. Marking acc. to other standards on request.															



Order Coding									
Part Number	Material	Seal	-	Gasket (Washer)	Serrated Washer	Lock Nut	Shroud	Earth Tag	Deluge Seal
Mandatory	Mandatory	Mandatory	-	Option	Option	Option	Option	Option	Option
See table	B Brass BN Brass nickel plated X Stainless steel 316L	S Silicone	-	WS Silicone	WSR Serrated washer	L Lock nut	S Shroud	E Earth tag	D Deluge Seal
Example									
CRX1SM	BN	S	-	WS	WSR	L	S	E	D

# CRUX

## Cable Glands for Non-Armoured Cables

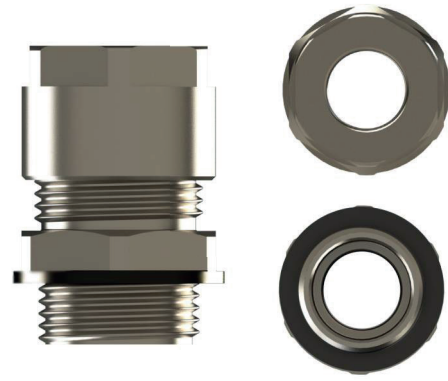



















Hazardous Applications

Thread Type METRIC acc. To ISO 965-3							
Outer Thread Size (Male)	Clamping Range Ø min-max mm	Outer Thread Length TL mm	Spanner Width		max. Height H mm.	Outer Ø D mm	Part Number
			SW Body mm	SW Cap mm			
M12	3.0 - 8.0	9.0	16.0	16.0	29.3	18.0	CRX0SM
M16	3.0 - 8.0	9.0	20.0	16.0	28.2	22.0	CRX01SM
	5.5 - 12.0	9.0	20.0	22.0	28.2	22.0	CRX01M
M20	3.0 - 8.0	9.0	24.0	16.0	28.2	26.5	CRX1XSM
	5.5 - 12.0	9.0	24.0	22.0	29.2	26.5	CRX1SM
	9.0 - 16.0	9.0	24.0	24.0	32.3	26.5	CRX1M
M25	9.0 - 16.0	9.0	30.0	24.0	32.3	33.0	CRX2SM
	12.0 - 20.0	9.0	30.0	30.0	35.6	33.0	CRX2M
M32	12.0 - 20.0	9.0	36.0	30.0	35.6	39.8	CRX3SM
	16.0 - 26.0	9.0	36.0	36.0	38.6	39.8	CRX3M
M40	16.0 - 26.0	9.0	46.0	36.0	38.6	51.0	CRX4SM
	20.0 - 33.0	9.0	46.0	46.0	44.5	51.0	CRX4M
M50	20.0 - 33.0	9.0	55.0	46.0	44.5	61.0	CRX5SM
	29.0 - 41.0	9.0	55.0	55.0	49.3	61.0	CRX5M
M63	29.0 - 41.0	9.0	67.0	55.0	49.3	73.0	CRX6SM
	36.0 - 52.0	9.0	67.0	65.0	55.5	73.0	CRX6M
M75	36.0 - 52.0	9.0	80.0	65.0	55.5	89.0	CRX7SM
	50.0 - 65.0	9.0	80.0	80.0	59.5	89.0	CRX7M
M80	50.0 - 65.0	9.0	95.0	80.0	59.5	105.0	CRX80SM
	61.0 - 78.0	9.0	105.0	95.0	67.0	118.0	CRX80M
M90	50.0 - 65.0	9.0	105.0	80.0	59.5	118.0	CRX8SM
	61.0 - 78.0	9.0	105.0	95.0	67.0	118.0	CRX8M
M100	61.0 - 78.0	9.0	120.0	95.0	67.0	134.0	CRX9SM
	75.0 - 89.0	9.0	120.0	106.0	60.0	134.0	CRX9M
M110	75.0 - 89.0	9.0	120.0	106.0	60.0	134.0	CRX10SM
	88.0 - 104.0	9.0	120.0	115.0	75.0	134.0	CRX10M
M115	75.0 - 89.0	9.0	120.0	106.0	60.0	134.0	CRX11SM
	88.0 - 104.0	9.0	120.0	115.0	75.0	134.0	CRX11M

## CRUX Cable Glands for Non-Armoured Cables

Crux




Technical Details															
<b>Body, Cap</b>	Brass, Brass Nickel Plated, Stainless Steel														
<b>Inner Parts</b>	Brass, Brass Nickel Plated, Stainless Steel														
<b>Material</b>	<b>Seal</b> Halogen Free Silicone														
	<b>O-ring</b> Halogen Free Silicone														
<b>Ingress Protection Rating</b>	IP 68 - 5 Bar, 30 min IP 66														
<b>Operating Temperature</b>	<b>Seal Material</b> <b>Silicone</b> -60°C to +130°C														
<b>Equipment For</b>	Gas & Dust potentially explosive atmospheres														
<b>Suitable for use in</b>	Group II                      Gas Group IIC                      ZONE1 / ZONE2 Group III                      Dust Group IIIC                      ZONE21 / ZONE 22														
<b>Equipment Marking</b>	Ex II 2GD Ex eb IIC Gb Ex tb IIIC Db														
<b>Thread Type</b>	<ul style="list-style-type: none"> <li>• Metric (M) ISO Pitch 1,5</li> <li>• NPT (N) ANSI ASME B1.20.1</li> <li>• Other thread types also available upon request.</li> </ul>														
<b>Cable Type</b>	Non-armoured & Braided when terminated inside enclosure														
<b>Accessories</b>	<ul style="list-style-type: none"> <li>• Lock nuts</li> <li>• Deluge Seal</li> <li>• Gaskets (Washers)</li> <li>• Serrated Washers</li> <li>• Earth tags</li> <li>• Shroud</li> </ul>														
<b>Remarks</b>	• Accessories must be ordered separately.														
<b>Approvals</b>	<table border="1"> <thead> <tr> <th>Certificate Number</th> <th>Standards</th> </tr> </thead> <tbody> <tr> <td> CESI 21 ATEX 031X</td> <td>EN 60079-0 EN 60079-7 EN 60079-31</td> </tr> <tr> <td> IECEx CES 22.0009X</td> <td>IEC 60079-0 IEC 60079-7 IEC 60079-31</td> </tr> <tr> <td> In progress</td> <td>In progress</td> </tr> <tr> <td> In progress</td> <td>In progress</td> </tr> <tr> <td> In progress</td> <td>In progress</td> </tr> <tr> <td> In progress</td> <td>In progress</td> </tr> </tbody> </table>	Certificate Number	Standards	 CESI 21 ATEX 031X	EN 60079-0 EN 60079-7 EN 60079-31	 IECEx CES 22.0009X	IEC 60079-0 IEC 60079-7 IEC 60079-31	 In progress	In progress	 In progress	In progress	 In progress	In progress	 In progress	In progress
Certificate Number	Standards														
 CESI 21 ATEX 031X	EN 60079-0 EN 60079-7 EN 60079-31														
 IECEx CES 22.0009X	IEC 60079-0 IEC 60079-7 IEC 60079-31														
 In progress	In progress														
 In progress	In progress														
 In progress	In progress														
 In progress	In progress														
-For details of approvals, see our website. * The standard marking consists ATEX & IECEx only. Marking acc. to other standards on request.															



Order Coding									
Part Number	Material	Seal	-	Gasket (Washer)	Serrated Washer	Lock Nut	Shroud	Earth Tag	Deluge Seal
Mandatory	Mandatory	Mandatory	-	Option	Option	Option	Option	Option	Option
See table	B Brass BN Brass nickel plated X Stainless steel 316L	S Silicone	-	WS Silicone	WSR Serrated washer	L Lock nut	S Shroud	E Earth tag	D Deluge Seal
Example									
CRX1SM	BN	S	-	WS	WSR	L	S	E	D

# CRUX

## Cable Glands for Non-Armoured Cables

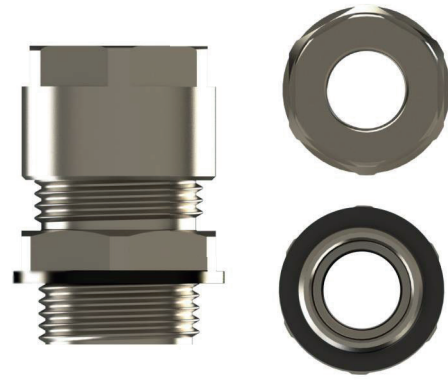

Hazardous Applications

Thread Type NPT acc. to ANSI ASME B1.20.1							
Outer Thread Size	Clamping Range	Outer Thread Length TL mm	Spanner Width		Max Height H mm.	Outer Ø D mm	Part Number
	Ø min-max mm		SW Body mm	SW Cap mm			
1/4"	3.0 - 8.0	16.0	16.0	16.0	29.3	18.0	CRX0SN
3/8"	3.0 - 8.0	16.0	20.0	16.0	28.2	22.0	CRX01SN
	5.5 - 12.0	16.0	20.0	22.0	28.2	22.0	CRX01N
1/2"	3.0 - 8.0	21.0	24.0	16.0	28.2	26.5	CRX1XSN
	5.5 - 12.0	21.0	24.0	22.0	29.2	26.5	CRX1SN
	9.0 - 16.0	21.0	24.0	24.0	32.3	26.5	CRX1N
3/4"	9.0 - 16.0	21.0	30.0	24.0	32.3	33.0	CRX2SN
	12.0 - 20.0	21.0	30.0	30.0	35.6	33.0	CRX2N
1"	12.0 - 20.0	26.0	36.0	30.0	35.6	39.8	CRX3SN
	16.0 - 26.0	26.0	36.0	36.0	38.6	39.8	CRX3N
1 1/4"	16.0 - 26.0	28.0	46.0	36.0	38.6	51.0	CRX4SN
	20.0 - 33.0	28.0	46.0	46.0	44.5	51.0	CRX4N
1 1/2"	20.0 - 33.0	28.0	55.0	46.0	44.5	61.0	CRX5SN
	29.0 - 41.0	28.0	55.0	55.0	49.3	61.0	CRX5N
2"	29.0 - 41.0	28.0	67.0	55.0	49.3	73.0	CRX6SN
	36.0 - 52.0	28.0	67.0	65.0	55.5	73.0	CRX6N
2 1/2"	36.0 - 52.0	41.0	80.0	65.0	55.5	89.0	CRX7SN
	50.0 - 65.0	41.0	80.0	80.0	59.5	89.0	CRX7N
3"	50.0 - 65.0	43.0	105.0	80.0	59.5	118.0	CRX80SN
	61.0 - 78.0	43.0	105.0	95.0	67.0	118.0	CRX80N
3 1/2"	61.0 - 78.0	43.0	120.0	95.0	67.0	134.0	CRX8SN
	75.0 - 89.0	43.0	120.0	106.0	60.0	134.0	CRX8N
4"	75.0 - 89.0	44.0	120.0	106.0	60.0	134.0	CRX9SN
	88.0 - 104.0	44.0	120.0	115.0	75.0	134.0	CRX9N