


Hygienic Ventilation Plug, Stainless Steel



Technical Details		
Body and Cap	Stainless Steel 1.4305 (AISI 303)	
Locknut and Ventile	Stainless Steel 1.4305 (AISI 303)	
Material	Washer	EPDM, acc. to FDA guideline 21 CFR 177.2600
	Vent. Membran	Acrylic copolymer on nylon-support
O-Ring	NBR	
Ingress Protection Rating	IP69, 68, 67, 66	
UL Environmental Rating	-----	
Operation Temperature	-40°C to 100°C	
Thread Type	• Metric	
Accessories	• Serrated (Washers)	
Remarks	• Accessories must be ordered separately.	
	• Other steel grades on request.	
Approvals	Certificate Number	Standards
	E350312	

-For more information see our webpage.

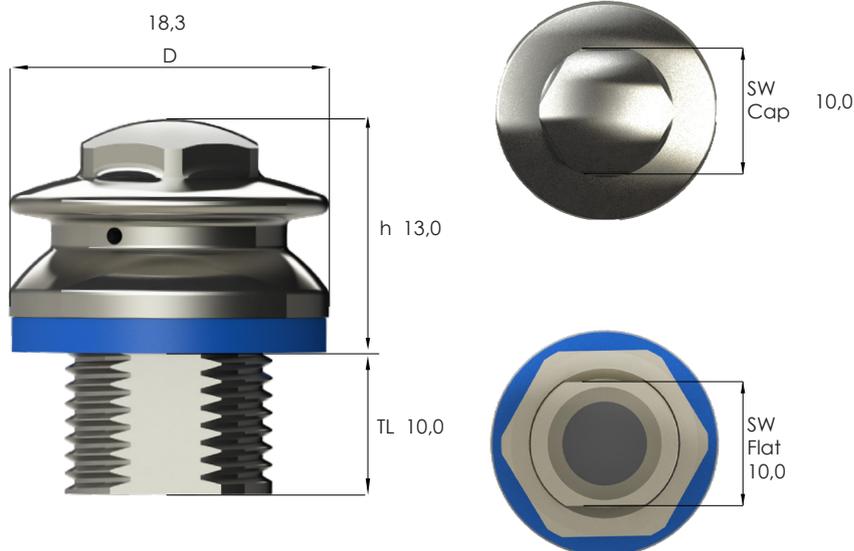

*Locknut is included. Not shown in the drawings.

Thread Type **METRIC** acc. to EN 60423

Outer Thread Size (Male)	Average Air Flow for $\Delta P = 70$ mbar l/h	Water Intrusion Pressure (bar)	Outer Thread Length TL mm	Spanner Width		Outer \varnothing D mm	Max. Height h mm	Spanner Width Locknut SW mm	Part Number	Minimum Order Quantity
				SW Cap mm	SW Flat mm					
M12x1,5	50	0,1	10,0	10	10	18,3	13,0	15,0	HBBHVP-01-L	1000