



Industrial Crux Cable Gland

Metal cable glands		
- For standard industrial applications that require high performance. - Easy assembly. - High quality strain relief and sealing reliable performance for standard industrial applications. - Wide clamping ranges.		
Technical Details		
Material	Body, Cap	Brass, Brass Nickel plated, Stainless Steel
	Seal, Gasket	Silicone (LSHF)
Mechanical Classification		Impact = Level 8
Design Specification		EN 62444, BS 6121-1, IEC 62444
Ingress Protection Rating		IP 68 – 10 Bar, 30 min
		IP 66
Silicone		
Operating Temperature		-60 °C to +150 °C
Thread Type		• Metric EN 60423
		• NPT ANSI B1.20.1
		• PG DIN 40430
		• Other thread types also available upon request.
Cable Type		Non Armoured, Braided when terminated inside enclosure
Accessories		• Lock nuts
		• Gaskets
		• Earhtag
		• Serrated Washer
		• Shroud
Remarks		- Manufactured according to DIN EN 62444/50262. - Accessories must be ordered separately.
Deluge Protection Compliance		DTS01:91

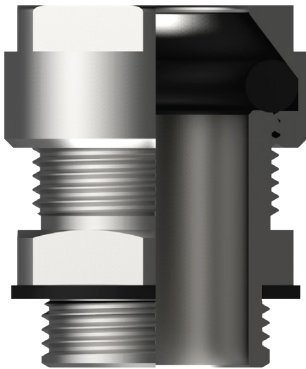

Industrial Crux Cable Glands

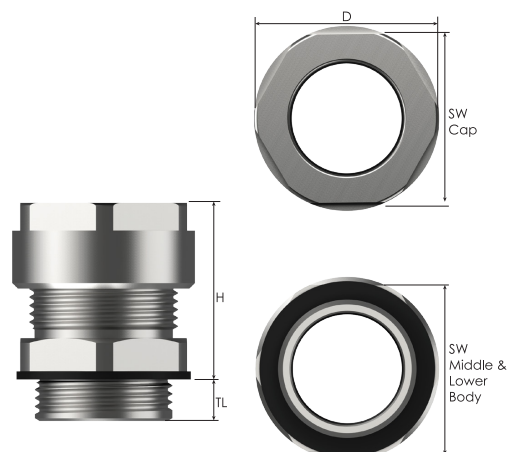

Thread Type METRIC acc. To EN 60426							
Outer Thread Size	Clamping Range acc. to EN 62444	Outer Thread Length	Spanner Width		Max Height	Outer Diameter	Part Number
	Ø min-max mm	TL mm	Body mm	Cap mm	H mm.	D mm	
M12	2,0-8,0	9,0	16,0	16,0	29,30	18	CRX-E0SM
M16	2,0-8,0	9,0	20,0	16,0	28,20	22	CRX-E01SM
	5,0-12,0	9,0	20,0	22,0	28,20	22	CRX-E01M
M20	2,0-8,0	9,0	24,0	16,0	28,20	26,5	CRX-E1XSM
	5,0-12,0	9,0	24,0	22,0	29,20	26,5	CRX-E1SM
	8,0-16,0	9,0	24,0	24,0	32,30	26,5	CRX-E1M
M25	8,0-16,0	9,0	30,0	24,0	32,30	33	CRX-E2SM
	12,0-20,0	9,0	30,0	30,0	35,60	33	CRX-E2M
M32	12,0-20,0	9,0	36,0	30,0	35,60	39,8	CRX-E3SM
	15,5-26,0	9,0	36,0	36,0	38,60	39,8	CRX-E3M
M40	15,5-26,0	9,0	46,0	36,0	38,60	51	CRX-E4SM
	19,0-33,0	9,0	46,0	46,0	44,50	51	CRX-E4M
M50	19,0-33,0	9,0	55,0	46,0	44,50	61	CRX-E5SM
	26,0-41,0	9,0	55,0	55,0	49,30	61	CRX-E5M
M63	26,0-41,0	9,0	67,0	55,0	49,30	73	CRX-E6SM
	33,0-52,0	9,0	67,0	65,0	55,50	73	CRX-E6M
M75	33,0-52,0	9,0	80,0	65,0	55,50	89	CRX-E7SM
	48,0-65,0	9,0	80,0	80,0	59,50	89	CRX-E7M
M80	48,0-65,0	9,0	95,0	80,0	59,50	105	CRX-E80SM
	60,0-78,0	9,0	105,0	95,0	67,00	118	CRX-E80M
M90	48,0-65,0	9,0	105,0	80,0	59,50	118	CRX-E8SM
	60,0-78,0	9,0	105,0	95,0	67,00	118	CRX-E8M
M100	60,0-78,0	9,0	120,0	95,0	67,00	134	CRX-E9SM
	71,0-89,0	9,0	120,0	106,0	60,00	134	CRX-E9M
M110	71,0-89,0	9,0	120,0	106,0	60,00	134	CRX-E10SM
	85,0-104,0	9,0	120,0	115,0	75,00	134	CRX-E10M
M115	72,0-89,0	9,0	120,0	106,0	60,00	134	CRX-E11SM
	85,0-104,0	9,0	120,0	115,0	75,00	134	CRX-E11M