

Technical Data Sheet - Apus


General

For applications in explosive environments.
For Group II & III (Gas & Dust) - Ex-d/e.
Enlargers for the transition of different thread types and sizes.
Can be used with intrinsically safe circuits.
Up-to-date international approvals.



Technical

Suitable for use in	Group I, Group II, Group III
Equipment Marking	EX I M2 Ex db I Mb, Ex eb I Mb EX II 2GD Ex db IIC Gb, Ex eb IIC Gb, Ex tb IIIC Db
Ingress Protection Rating	IP66, IP68 - 5 Bar, 30 min
Cable Gland Material	Brass, Brass Nickel Plated, Stainless Steel, Aluminium
Seal Material	Chloroprene, Silicone
Operating Temperature	Chloroprene: -40°C to +100°C
Silicone: -60°C to +130°C	Thread Type
Metric, NPT	Other thread types available upon request.
Accessories	Lock nuts, Gaskets (Washers)
Remarks	Accessories must be ordered separately. O-ring available in Metric outer threads.

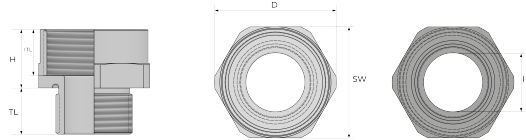

Thread Size M	Thread Size F	TL	ITL	SW	Outer Ø 'D'	Inner Ø 'ID'	Max. Height 'H'	Product Code
NPT 1	M63x1,5	26.0	20.0	68.0	75.0	26.0	25.0	B-RB6M3N

Certificates



Bimed Teknik Aletler San. ve Tic. A. Ş.

Özar Sanayi Bölgesi, Deliklikaya Mh. Yüzba Mehmet Hilmi Cd. No.28/1 Arnavutköy 34555 / İstanbul / Türkiye

T: +90 212 875 73 76

bimedteknik.com

info@bimedteknik.com

