


Lock-Nuts, Lead-Free Brass

Lock Nuts, Lead-Free Brass

- For standard industrial applications in harsh environments.
- Lead-free.
- Safe fastening of cable glands.

Technical Details	
Material	Lead-free brass, Nickel plated
Thread Type	<ul style="list-style-type: none"> • Metric EN 60423 • NPSL ANSI B1.20.1 • PG DIN 40430

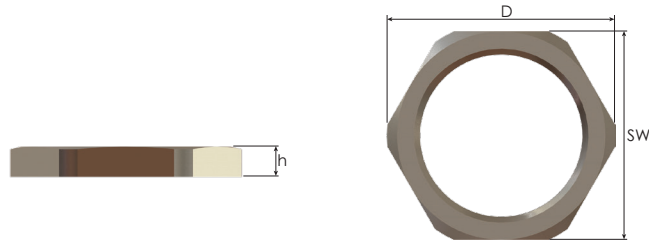

Thread Type METRIC acc. to EN 60423

Inner Thread Size (Female)	Spanner Width SW mm	Outer Ø D mm	Height h mm	Part Number
M12x1,5	15	16,6	2,8	BMBL-01 (LF)
M16x1,5	19	21,0	3,0	BMBL-02 (LF)
M20x1,5	24	26,5	3,5	BMBL-03 (LF)
M25x1,5	30	33,0	4,0	BMBL-04 (LF)
M32x1,5	36	39,5	5,0	BMBL-05 (LF)
M40x1,5	46	51,0	5,0	BMBL-06 (LF)
M50x1,5	60	66,0	5,0	BMBL-07 (LF)
M63x1,5	70	77,0	6,0	BMBL-08 (LF)

Thread Type NPSL acc. to ANSI B1.20.1

Inner Thread Size (Female)	Spanner Width SW mm	Outer Ø D mm	Height h mm	Part Number
NPSL 3/8"	24	26,5	5,0	BNLN-01 (LF)
NPSL 1/2"	24	26,5	5,0	BNLN-02 (LF)
NPSL 3/4"	34	37,5	6,0	BNLN-03 (LF)
NPSL 1"	42	46,4	6,0	BNLN-04 (LF)
NPSL 1 1/4"	52	57,4	7,0	BNLN-05 (LF)
NPSL 1 1/2"	60	65,1	7,0	BNLN-06 (LF)
NPSL 2"	74	81,8	8,0	BNLN-07 (LF)

Thread Type PG acc. to DIN 40430

Inner Thread Size (Female)	Spanner Width SW mm	Outer Ø D mm	Height h mm	Part Number
PG 7	15	16,6	2,8	BSL-01 (LF)
PG 9	18	20,0	2,8	BSL-02 (LF)
PG 11	21	23,5	3,0	BSL-03 (LF)
PG 13,5	23	25,5	3,0	BSL-04 (LF)
PG 16	26	29,0	3,0	BSL-05 (LF)
PG 21	32	35,5	3,5	BSL-06 (LF)
PG 29	41	45,0	4,0	BSL-07 (LF)
PG 36	51	56,0	5,0	BSL-08 (LF)
PG 42	60	66,0	5,0	BSL-09 (LF)
PG 48	64	70,5	5,5	BSL-10 (LF)

