



Reducing Seals Single, Rubber

Reducing seals, single

- For reducing the clamping ranges of cable glands.
- High quality strain relief and sealing, reliable performance for standard industrial applications.

Technical Details

Material	<ul style="list-style-type: none"> • CR (Chloroprene) • NBR • Silicone • EPDM
-----------------	---

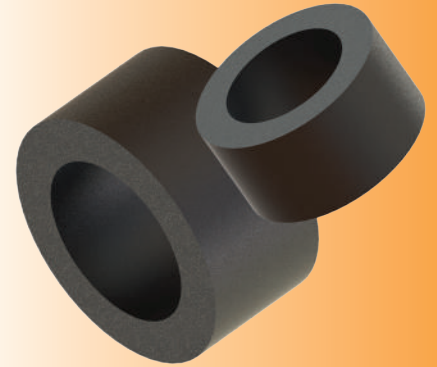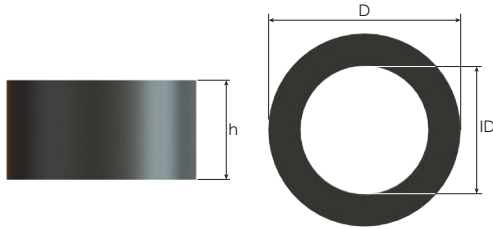

Reducing seals, single

Replaced Standard Seal Ø min-max mm	Clamping Range Reducing Seal Ø min-max mm	Inner Ø ID mm	Outer Ø D mm	Height h mm	Part Number				Minimum Order Quantity
					CR	NBR	Silicone	EPDM	
					black	black	red	black	
3,0 - 6,5	2,0 - 5,0	5,2	8,6	7,1	MS-05C	MS-05N	MS-05SR	MS-05E	500
4,0 - 8,0	2,0 - 6,0	6,3	10,9	7,0	MS-01C	MS-01N	MS-01SR	MS-01E	500
5,0 - 10,0	3,0 - 7,0	7,3	13,7	10,1	MS-01LC	MS-01LN	MS-01LSR	MS-01LE	500
6,0 - 12,0	5,0 - 9,0	9,4	16,0	8,4	MS-02C	MS-02N	MS-02SR	MS-02E	500
10,0 - 14,0	7,0 - 12,0	12,4	18,0	9,3	MS-02LC	MS-02LN	MS-02LSR	MS-02LE	500
11,0 - 17,0	9,0 - 13,0	13,5	20,4	10,7	MS-03LC	MS-03LN	MS-03LSR	MS-03LE	500
13,0 - 18,0	9,0 - 16,0	16,4	22,9	12,2	MS-03C	MS-03N	MS-03SR	MS-03E	500
15,0 - 21,0	11,0 - 15,0	15,5	25,4	14,2	MS-04LC	MS-04LN	MS-04LSR	MS-04LE	500
18,0 - 25,0	12,0 - 20,0	20,5	30,4	14,0	MS-04C	MS-04N	MS-04SR	MS-04E	500
19,0 - 28,0	16,0 - 23,0	23,5	33,40	17,0	MS-05LC	MS-05LN	MS-05LSR	MS-05LE	500
22,0 - 32,0	20,0 - 26,0	26,5	40,0	16,8	MS-05C	MS-05N	MS-05SR	MS-05E	500
30,0 - 38,0	25,0 - 31,0	31,5	45,0	16,5	MS-06C	MS-06N	MS-06SR	MS-06E	500
34,0 - 44,0	29,0 - 35,0	35,5	51,0	16,5	MS-07C	MS-07N	MS-07SR	MS-07E	500