

Reducing Seals Double, Rubber




Reducing seals, Double

- For reducing the clamping ranges of cable glands.
- Double seal optimizes the range used.
- Special design for high quality strain relief and sealing, reliable performance for standard industrial applications.

Technical Details

Material	• CR (Chloroprene)
	• NBR
	• Silicone
	• EPDM

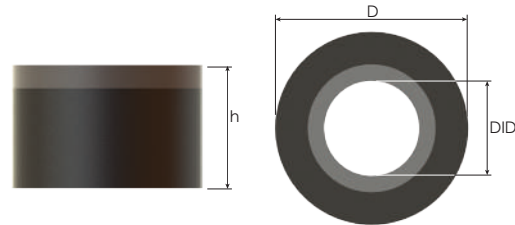

Bottom View

Reducing seals, double MDS (For Metal Glands)

Replaced Standard Seal		Clamping Range		Outer Ø	Inner Ø	Height	Part Number				Minimum Order Quantity
#1	#2	Double Seal	Outer Seal				CR	NBR	Silicone	EPDM	
Ø min-max mm	Ø min-max mm	Ø min-max mm	Ø min-max mm	D mm	ID mm	h mm	black	black	red	black	
3,0 - 6,5	2,0 - 5,0	2,0 - 4,0	3,0 - 6,5	8,6	4,2	9,1	MDS-05C	MDS-05N	MDS-05SR	MDS-05E	500
4,0 - 8,0	2,0 - 6,0	3,0 - 5,0	4,0 - 8,0	10,7	5,2	9,0	MDS-01C	MDS-01N	MDS-01SR	MDS-01E	500
5,0 - 10,0	3,0 - 7,0	3,0 - 7,0	5,0 - 10,0	13,7	7,2	12,4	MDS-01LC	MDS-01LN	MDS-01LSR	MDS-01LE	500
7,0 - 13,0	-	3,0 - 7,0	7,0 - 13,0	16,7	7,3	9,4	MDS-02SC	MDS-02SN	MDS-02SSR	MDS-02SE	500
6,0 - 12,0	5,0 - 9,0	5,0 - 8,5	6,0 - 12,0	16,0	8,7	10,4	MDS-02C	MDS-02N	MDS-02SR	MDS-02E	500
10,0 - 14,0	7,0 - 12,0	7,0 - 12,0	10,0 - 14,0	18,0	11,3	11,3	MDS-02LC	MDS-02LN	MDS-02LSR	MDS-02LE	500
11,0 - 17,0	9,0 - 13,0	8,0 - 13,0	11,0 - 17,0	20,4	13,2	11,5	MDS-03LC	MDS-03LN	MDS-03LSR	MDS-03LE	500
13,0 - 18,0	9,0 - 16,0	9,0 - 14,0	13,0 - 18,0	22,9	14,2	14,7	MDS-03C	MDS-03N	MDS-03SR	MDS-03E	500
15,0 - 21,0	11,0 - 15,0	11,0 - 16,0	15,0 - 21,0	25,2	16,3	16,7	MDS-04LC	MDS-04LN	MDS-04LSR	MDS-04LE	500
18,0 - 25,0	12,0 - 20,0	13,0 - 20,0	18,0 - 25,0	30,5	20,5	16,5	MDS-04C	MDS-04N	MDS-04SR	MDS-04E	500
19,0 - 28,0	16,0 - 23,0	16,0 - 21,0	19,0 - 28,0	33,2	21,3	19,5	MDS-05LC	MDS-05LN	MDS-05LSR	MDS-05LE	500
22,0 - 32,0	20,0 - 26,0	20,0 - 26,0	22,0 - 32,0	40,0	26,5	19,3	MDS-05C	MDS-05N	MDS-05SR	MDS-05E	500
30,0 - 38,0	25,0 - 31,0	21,0 - 31,0	30,0 - 38,0	46,0	31,4	19,5	MDS-06C	MDS-06N	MDS-06SR	MDS-06E	500
34,0 - 44,0	29,0 - 35,0	27,0 - 35,0	34,0 - 44,0	51,0	35,4	19,5	MDS-07C	MDS-07N	MDS-07SR	MDS-07E	500

Reducing seals, double PDS (For Plastic Glands)

Replaced Standard Seal		Clamping Range		Outer Ø	Inner Ø	Height	Part Number				Minimum Order Quantity
#1	#2	Double Seal	Outer Seal				CR	NBR	Silicone	EPDM	
Ø min-max mm	Ø min-max mm	Ø min-max mm	Ø min-max mm	D mm	ID mm	h mm	black	black	red	black	
3,0 - 6,5	2,0 - 5,0	2,0 - 3,0	3,0 - 6,5	8,6	4,2	8,1	PDS-05C	PDS-05N	PDS-05SR	PDS-05E	500
4,0 - 8,0	2,0 - 6,0	3,0 - 4,0	4,0 - 8,0	10,7	5,2	8,0	PDS-01C	PDS-01N	PDS-01SR	PDS-01E	500
5,0 - 10,0	3,0 - 7,0	3,0 - 5,0	5,0 - 10,0	13,7	7,2	11,4	PDS-01LC	PDS-01LN	PDS-01LSR	PDS-01LE	500
7,0 - 13,0	-	3,0 - 7,0	7,0 - 13,0	16,7	7,3	9,4	PDS-02SC	PDS-02SN	PDS-02SR	PDS-02SE	500
6,0 - 12,0	5,0 - 9,0	5,0 - 6,0	6,0 - 12,0	16,0	8,7	9,4	PDS-02C	PDS-02N	PDS-02SR	PDS-02E	500
10,0 - 14,0	7,0 - 12,0	7,0 - 10,0	10,0 - 14,0	18,0	11,3	10,3	PDS-02LC	PDS-02LN	PDS-02LSR	PDS-02LE	500
11,0 - 17,0	9,0 - 13,0	8,0 - 11,0	11,0 - 17,0	20,4	13,2	11,7	PDS-03LC	PDS-03LN	PDS-03LSR	PDS-03LE	500
13,0 - 18,0	9,0 - 16,0	9,0 - 13,0	13,0 - 18,0	22,9	14,2	13,2	PDS-03C	PDS-03N	PDS-03SR	PDS-03E	500
15,0 - 21,0	11,0 - 15,0	11,0 - 15,0	15,0 - 21,0	25,2	16,3	15,2	PDS-04LC	PDS-04LN	PDS-04LSR	PDS-04LE	500
18,0 - 25,0	12,0 - 20,0	13,0 - 18,0	18,0 - 25,0	30,5	20,5	15,0	PDS-04C	PDS-04N	PDS-04SR	PDS-04E	500
19,0 - 28,0	16,0 - 23,0	16,0 - 19,0	19,0 - 28,0	33,2	21,3	18,0	PDS-05LC	PDS-05LN	PDS-05LSR	PDS-05LE	500
22,0 - 32,0	20,0 - 26,0	20,0 - 22,0	22,0 - 32,0	40,0	26,5	17,8	PDS-05C	PDS-05N	PDS-05SR	PDS-05E	500
30,0 - 38,0	25,0 - 31,0	21,0 - 30,0	30,0 - 38,0	46,0	31,4	17,5	PDS-06C	PDS-06N	PDS-06SR	PDS-06E	500
34,0 - 44,0	29,0 - 35,0	27,0 - 34,0	34,0 - 44,0	51,0	35,4	17,5	PDS-07C	PDS-07N	PDS-07SR	PDS-07E	500